

Sustainable European plywood



Surface hardness

Phenolic film with exceptional impact and abrasion resistance.



Xtra Option available.



Strength and stability

Core reinforced with Eucalyptus Globulus.



Outdoor durability

Class III phenolic gluing and edges sealed with damp-proof paint.



Sustainability

Wood from sustainable European tree areas.





ANTI-SLIP PINE PANEL REINFORCED WITH EUCALYPTUS GLOBULUS

The pine core is reinforced with Eucalyptus Globulus, the densest of eucalyptus species, to improve panel strength while maintaining great stability and dimensional uniformity. Edges sealed with damp-proof paint.


The anti-slip phenolic film provides the panel with exceptional impact and abrasion resistance while also reducing water penetration.

Available with:

- 240 g/m² anti-slip face and 120 g/m² smooth back.
- 170 g/m² anti-slip face and 170 g/m² smooth back.

Applications:

Especially designed for flooring in light commercial vehicles and other installations such as scaffolding, stages and temporary structures.

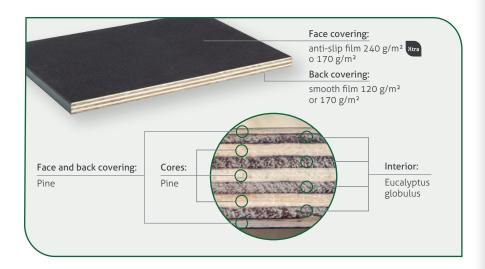

Detailed info:

- Sizes
- Thicknesses & compositions
- Bonding
- Technical specs
- Vertifications

Scan or click here >





Vehicle floors



Scaffolding



Stages



- @garnicaplywood
- @ @garnicaplywood
- in Garnica Plywood
- Garnica
- @garnicaplywood
- f Garnica



The figures included in this technical data file are for information purposes only and have no contractual value. The formats, dimensions, thickness, plies and technical characteristics may vary with no prior notification based on new developments and technical contractions and technical characteristics may vary with no prior notification based on new developments and technological advancements. The buyer is responsible for deciding whether the Garnica product is suitable for the desired application, and will be required to ensure that the location and way in which it is used are suitable according to the manufacturer's instructions and suggestions, as well as its compliance with current regulations. Health and safety. The user/recipient of the product is obliged to carry out risk assessments of the people whom are going to process/transform it based on the local health and safety legal requirements, implementing the necessary controls in order to provide appropriate preventive measures: e.g. manual handling, dust extraction in case of cutting/sanding, use of personal protection equipment, etc. You can request more information at info@garnica.one.